


- A – Aseptic pump
- B – Tank pump
- F – Oversized open throat with auger
- G – Beverage pump
- H – Sanitary pump
- M – Mixing pump (B.Max)
- O – Open throat with auger
- P – Bridge breaker with auger pump
- S – quadratic throat
- T – Immersible pump
- Y – Flanged/threaded connection pump

- B – Close coupled
- C – Compact
- M – Magnet coupling
- S – Bearing housing

- L – 1/2 elongated geometry
- S – 1/2 geometry
- P – 2/3 elongated geometry
- D – 2/3 geometry

**NETZSCH MOHNO**

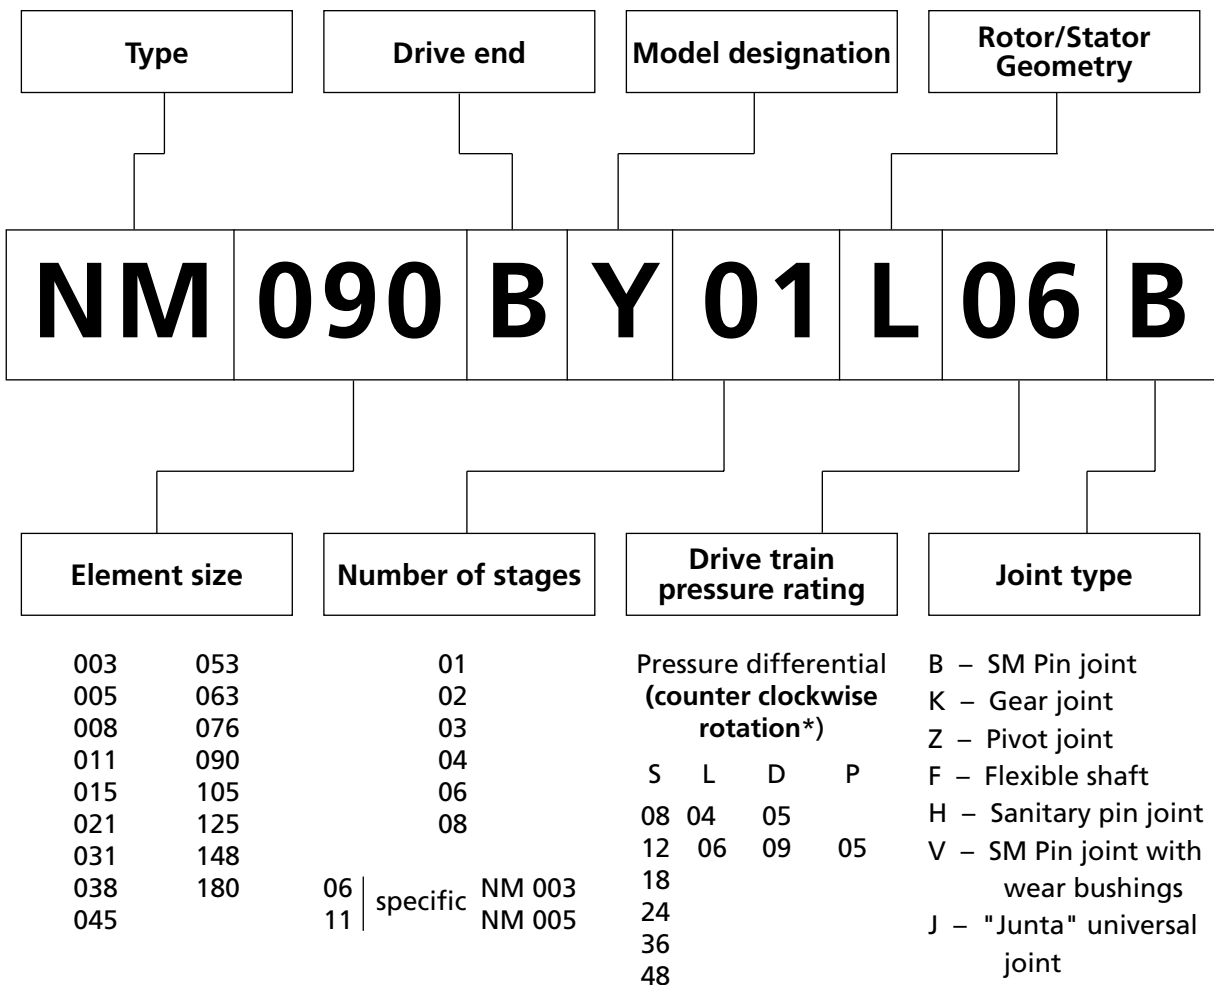

\*) Maximum allowable pressure differential of drive train operating counter clockwise. Do not confuse with the maximum allowable pressure per stage of the rotor and stator:  
 S ... 6 bar                      D ... 8 bar  
 L ... 8 bar                        P ... 8 bar.